

HGT US

HGT is USDA certified and approved for sanitary production environments. The footplate and the spindle are unattached, the small center platform is diametric...

TYPE HGT US




This combination of foot plate and thread is USDA certified and is consequently approved for demanding sanitary applications. Foot plates and threads are delivered separately. The fixation of the thread is controlled by a diametrically centered elevation on the foot plate. The sleeve covers the thread and also functions as a nut. The machine foot admits slopes up to 15° of floors and equipment. Type HGT HYGIENIC is available with anti-slip rubber HGT90, HGT110

FOOT PLATE TYPE	SPINDLE THREAD (UNC)	THREAD LENGTH (inches)	TOTAL HEIGHT (inches)	MACHINE FOOT LOAD (N)	PRODUCT DESCRIPTION
3,54	5/8	6,5	7,28	30.300	RHGT090-HT US5865-RHO5825
3,54	5/8	8,5	9,28	19.800	RHGT090-HT US5885-RHO5835
3,54	3/4	6,5	7,28	43.800	RHGT090-HT US3465-RHO3425
3,54	3/4	8,5	9,28	41.200	RHGT090-HT US3485-RHO3435
3,54	1	6,5	7,28	77.500	RHGT090-HT US1065-RHO1025
3,54	1	8,5	9,28	77.500	RHGT090-HT US1085-RHO1035
3,54	1 1/4	6,5	7,28	123.400	RHGT090-HT US5465-RHO5425
3,54	1 1/4	8,5	9,28	123.400	RHGT090-HT US5485-RHO5435
4,33	5/8	6,5	7,28	30.300	RHGT110-HT US5865-RHO5825
4,33	5/8	8,5	9,28	19.800	RHGT110-HT US5885-RHO5835
4,33	3/4	6,5	7,28	43.800	RHGT110-HT US3465-RHO3425
4,33	3/4	8,5	9,28	41.200	RHGT110-HT US3485-RHO3435
4,33	1	6,5	7,28	77.500	RHGT110-HT US1065-RHO1025
4,33	1	8,5	9,28	77.500	RHGT110-HT US1085-RHO1035

4,33	1 1/4	6,5	7,28	123.400	RHGT110-HT US5465-RHO5425
4,33	1 1/4	8,5	9,28	123.400	RHGT110-HT US5485-RHO5435

TYPE HGT US AS

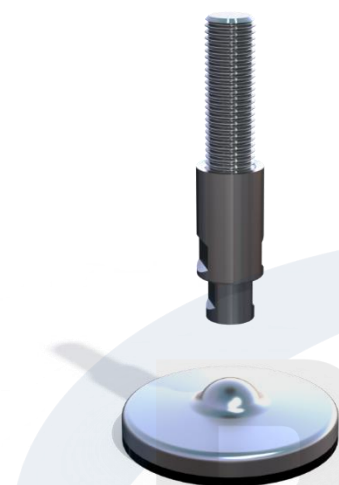

This combination of foot plate and thread is USDA certified and is consequently approved for demanding sanitary applications. Foot plates and threads are delivered separately. The fixation of the thread is controlled by a diametrically centered elevation on the foot plate. The sleeve covers the thread and also functions as a nut. The machine foot admits slopes up to 15° of floors and equipment. Type HGT HYGIENIC AS is with anti-slip rubber. HGT90, HGT110

FOOT PLATE TYPE	SPINDLE THREAD (UNC)	THREAD LENGTH (inches)	TOTAL HEIGHT (inches)	MACHINE FOOT LOAD (N)	PRODUCT DESCRIPTION
3,54	5/8	6,5	7,48	30.000	RHGT090AS-HT US5865-RHO5825
3,54	5/8	8,5	9,48	19.800	RHGT090AS-HT US5885-RHO5835
3,54	3/4	6,5	7,48	30.000	RHGT090AS-HT US3465-RHO3425
3,54	3/4	8,5	9,48	30.000	RHGT090AS-HT US3485-RHO3435
3,54	1	6,5	7,48	30.000	RHGT090AS-HT US1065-RHO1025
3,54	1	8,5	9,48	30.000	RHGT090AS-HT US1085-RHO1035
3,54	1 1/4	6,5	7,48	30.000	RHGT090AS-HT US5465-RHO5425
3,54	1 1/4	8,5	9,48	30.000	RHGT090AS-HT US5485-RHO5435
4,33	5/8	6,5	7,48	30.000	RHGT110AS-HT US5865-RHO5825
4,33	5/8	8,5	9,48	19.800	RHGT110AS-HT US5885-RHO5835
4,33	3/4	6,5	7,48	30.000	RHGT110AS-HT US3465-RHO3425
4,33	3/4	8,5	9,48	30.000	RHGT110AS-HT US3485-RHO3435
4,33	1	6,5	7,48	30.000	RHGT110AS-HT US1065-RHO1025

4,33	1	8,5	9,48	30.000	RHGT110AS-HT US1085-RHO1035
4,33	1 1/4	6,5	7,48	30.000	RHGT110AS-HT US5465-RHO5425
4,33	1 1/4	8,5	9,48	30.000	RHGT110AS-HT US5485-RHO5435

